

Perforated Metal / CEILINGS

PROJECT		REFERENCE TYPE		DATE	
SPECIFIED BY		QUANTITY		NOTE	

Architectural Perforated Metal Solutions

Transform your space by combining the unique look and feel of metal with almost unlimited possibilities for shapes, patterns, and even detailed images.

Description


Perforated metal ceiling panels are designed to integrate into standard T-bar grid ceilings that offer the option of selecting one of the standard available patterns or creating something completely unique.

Panels are available in a wide range of powercoat finishes with the option to add acoustic felt for additional color and noise reduction.




A Variety of Perforation Options

From simple symmetrically repeating geometric patterns to complete images recreated with perforations, there is a solution that's perfect for your design. Combined with your favorite finish and an option to add acoustic felt in a variety of colors you can play with aesthetics, texture, and color to make your space unforgettable.

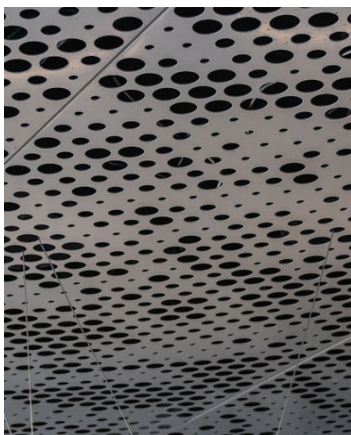

Puncto

Symmetrical and abstract modern patterns and textures created from common geometric perforation shapes

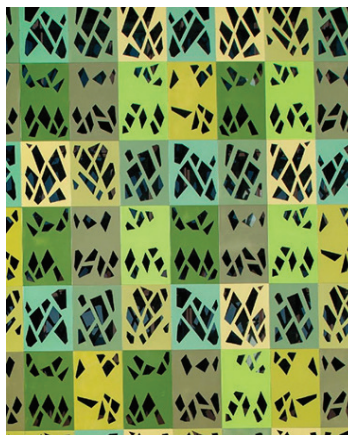

Lasion

Laser cut allows free form perforation, enhancing organic shapes and unique geometries in pattern designs




Picto

An advanced image transfer technology that translates any image into a geometric perforation pattern design


Perforated Metal / CEILINGS

Puncto – Standard Patterns


Select from 9 simple symmetrically repeating geometric patterns based on circles, rectangles, or squares.

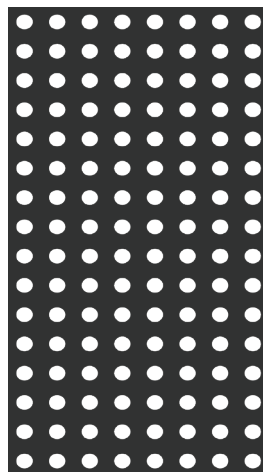


Pattern: SCO1
Open area 26%
Perforation Ø 1"

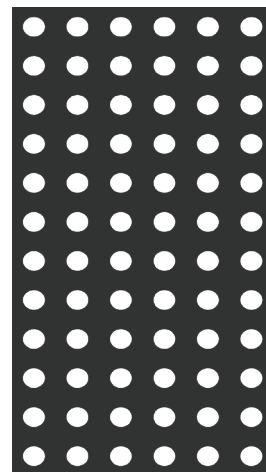


Pattern: SCO2
Open area 19%
Perforation Ø 2"

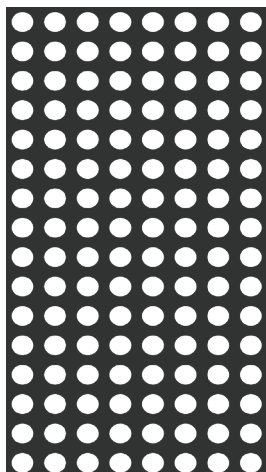


Pattern: SCO3
Open area 34%
Perforation Ø 2"

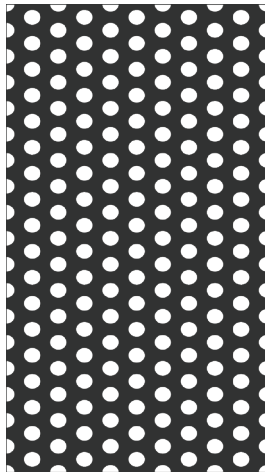


Pattern: SCO4
Open area 27%
Perforation Ø 1.5"

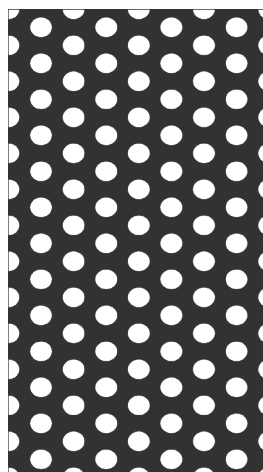


Pattern: SCO5
Open area 28%
Perforation Ø 2"

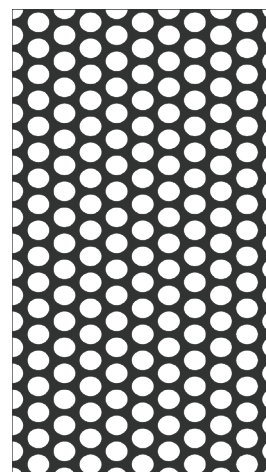


Pattern: SCO6
Open area 50%
Perforation Ø 2"

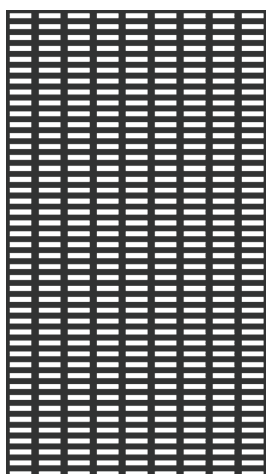

Pattern: SRO1
Open area 28%
Perforation 0.5" X 2.0"

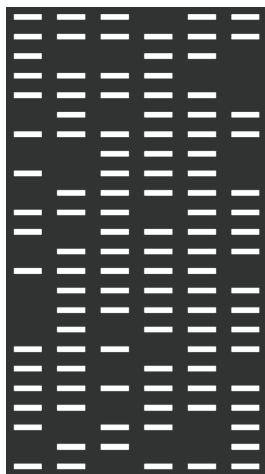

Pattern: APO1
Open area 28%

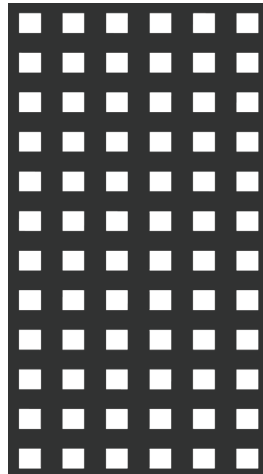


Pattern: APO1
Open area 28%
Perforation 2.0" X 2.0"




Perforated Metal / CEILINGS

Puncto – Abstract Patterns


Select from 14 abstract patterns based on common geometric shapes arranged in unique arrangements to create unforgettable ceilings.

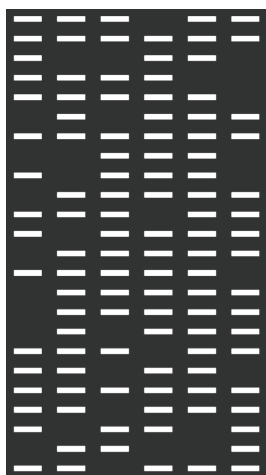


Pattern: APO1
Open area 28%

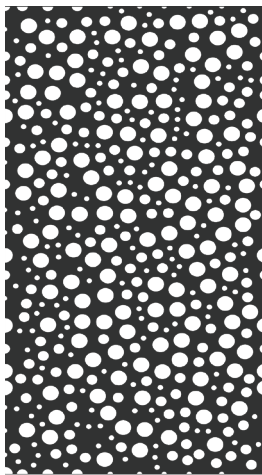


Pattern: APO2
Open area 32%

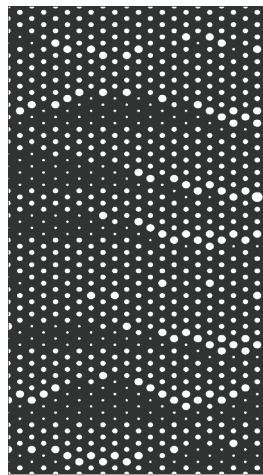


Pattern: APO3
Open area 13%

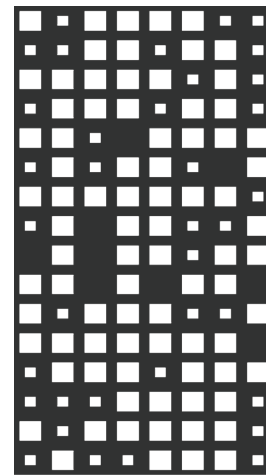


Pattern: APO4
Open area 31%

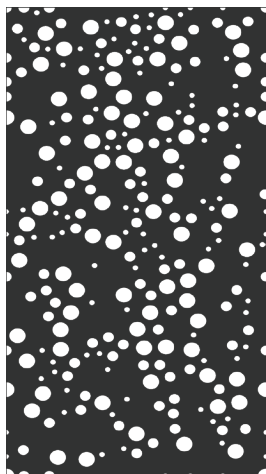


Pattern: APO5
Open area 17%

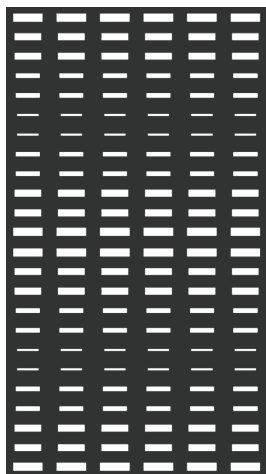


Pattern: API1
Open area 53%

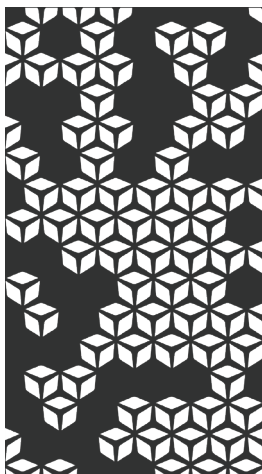


Pattern: API2
Open area 33%

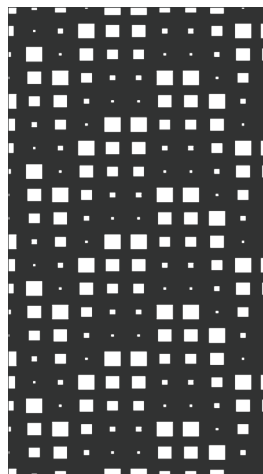

Pattern: API3
Open area 17%

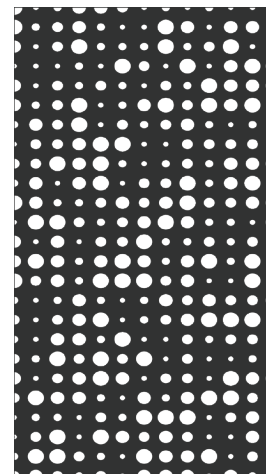


Pattern: API4
Open area 21%

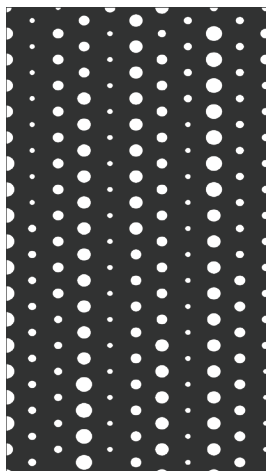


Pattern: API5
Open area 10%




Pattern: API6
Open area 16%

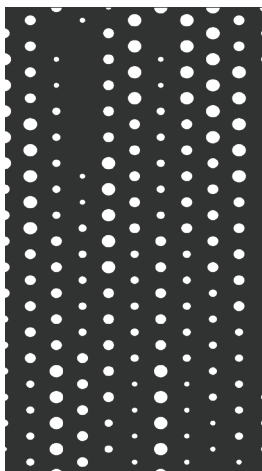

Pattern: API7
Open area 08%

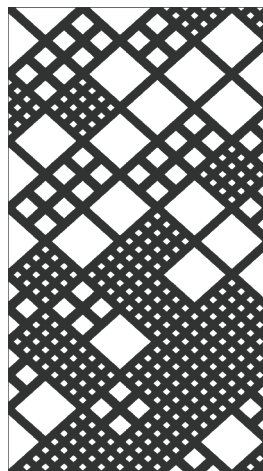

Pattern: API8
Open area 34%

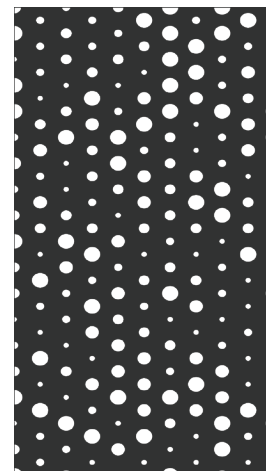


Pattern: API9
Open area 13%




Perforated Metal / CEILINGS

Lasion


Select from 15 laser cut patterns incorporating free form perforations to generate one-of-a-kind designs.

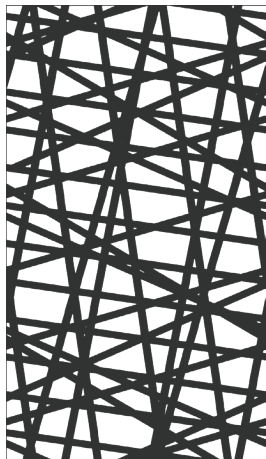

Pattern: AL01
Open area 45%

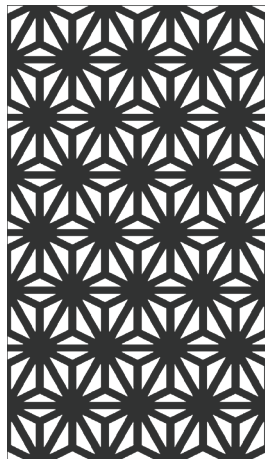


Pattern: AL02
Open area 32%

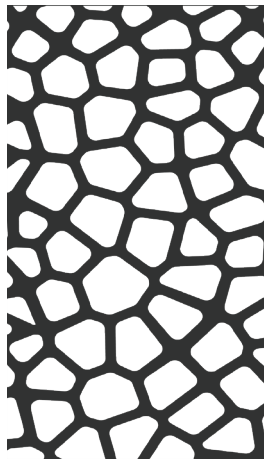


Pattern: AL04
Open area 60%




Pattern: AL12
Open area 48%

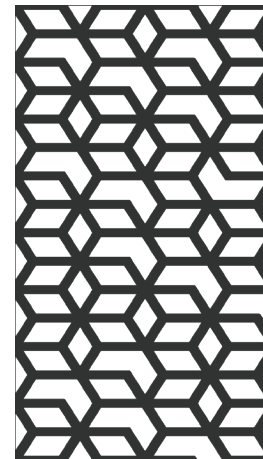


Pattern: AL05
Open area 61%

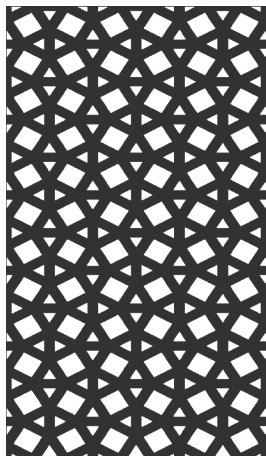


Pattern: AL06
Open area 31%

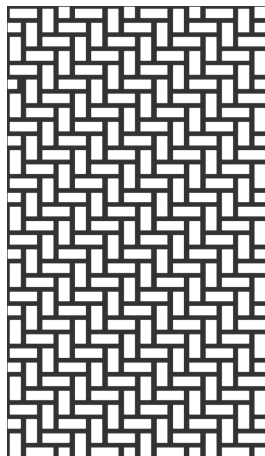


Pattern: AL07
Open area 55%

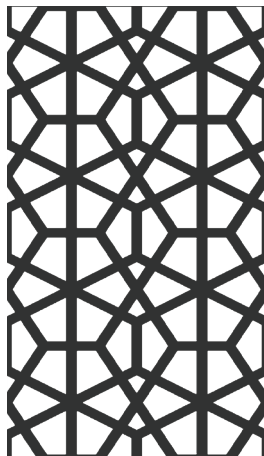

Pattern: AL08
Open area 53%

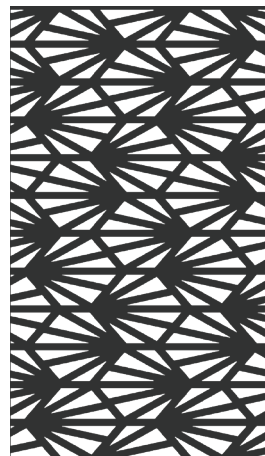

Pattern: AL09
Open area 34%

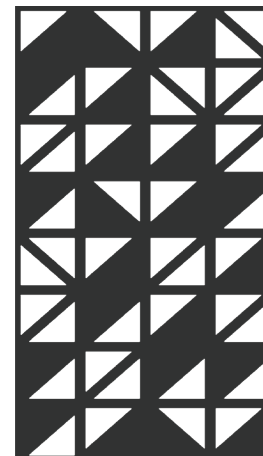


Pattern: AL10
Open area 33%




Pattern: AL11
Open area 45%




Pattern: AL12
Open area 48%

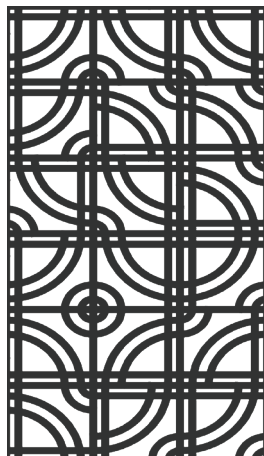

Pattern: AU01
Open area 48%

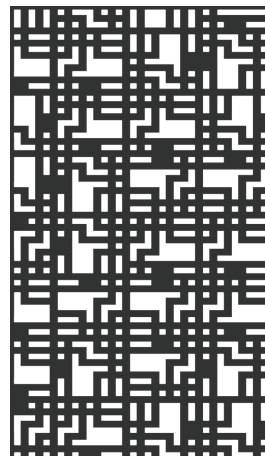

Pattern: AU02
Open area 25%

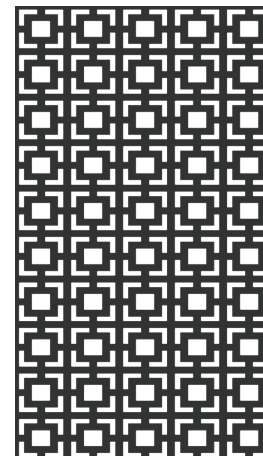

Pattern: AU03
Open area 35%





Perforated Metal / CEILINGS



Picto


Create your own unique design by incorporating an image that comes to life in perforations using advanced manufacturing techniques

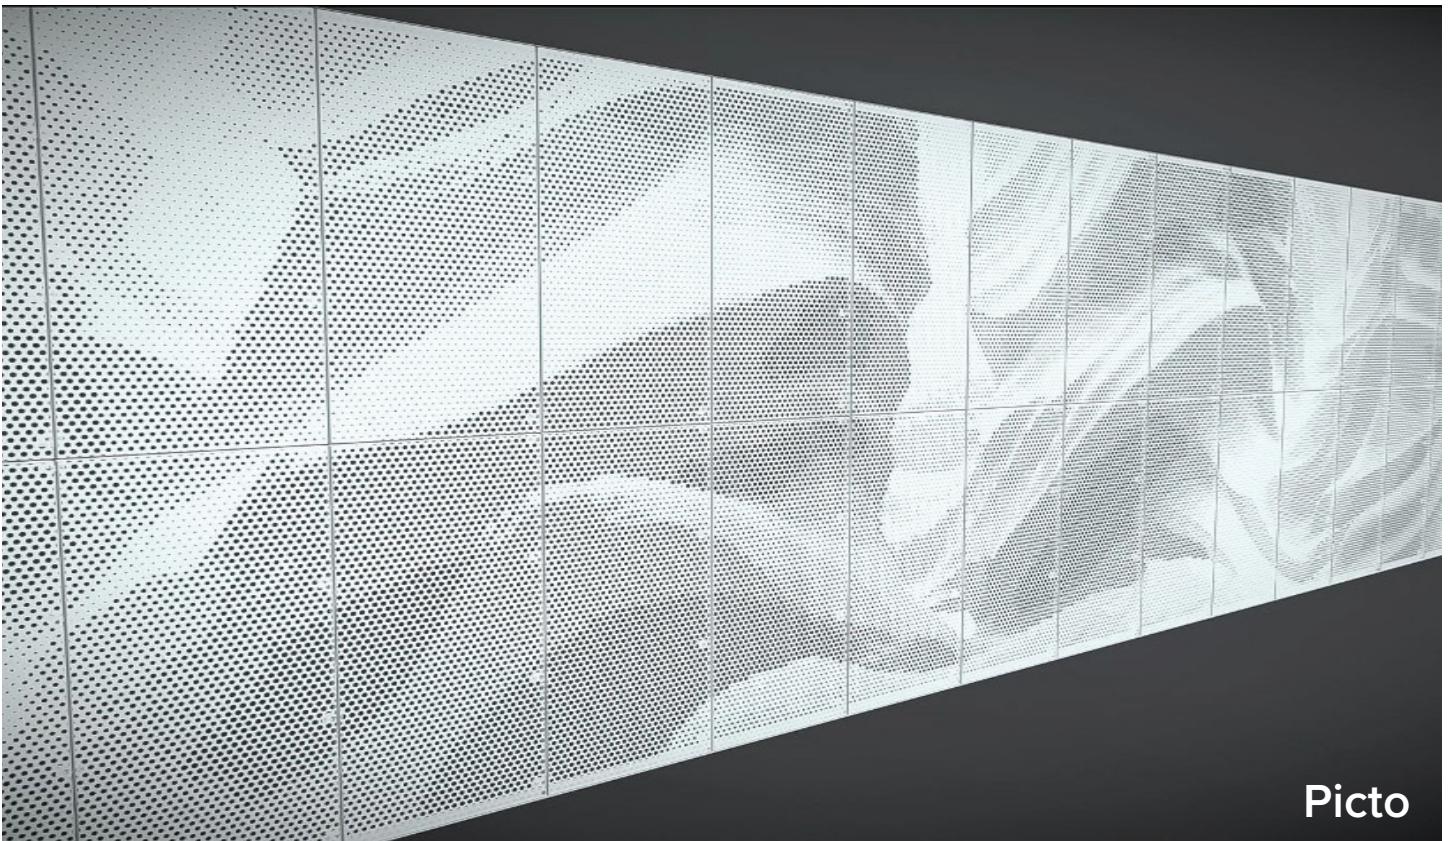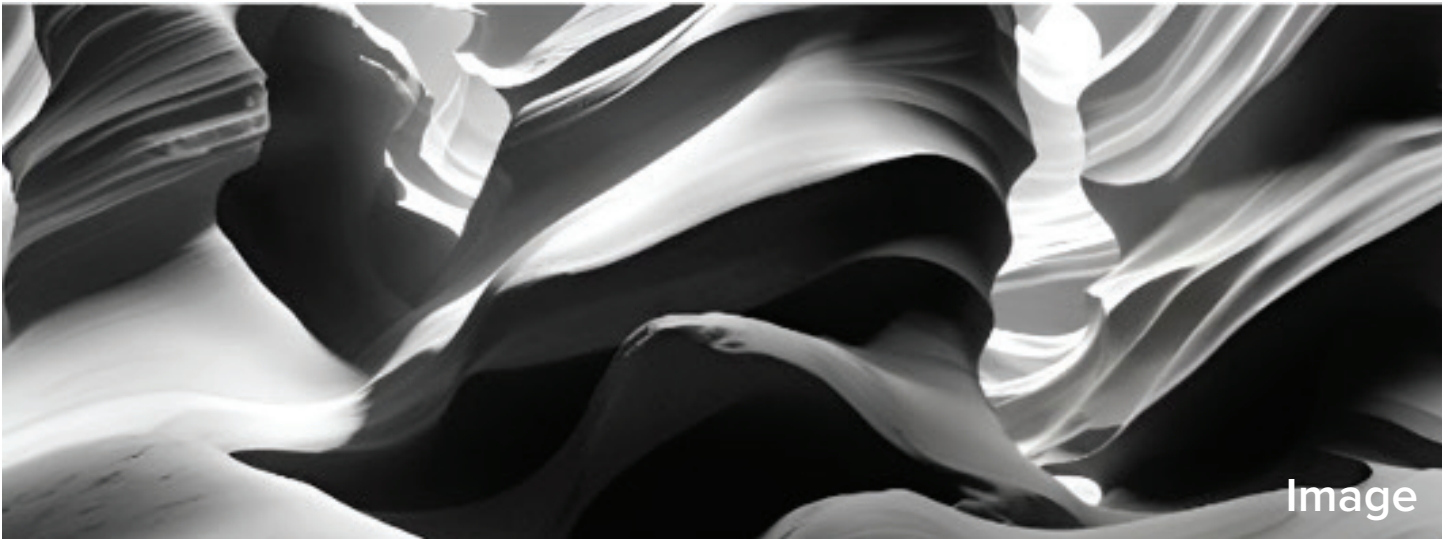

Perforated Metal / CEILINGS

Panel Details

Ceiling panels are designed to easily integrate into standard 15/16" T-Bar grid ceilings. Available in 5 sizes, the panels are made from lightweight aluminum and utilize a simple torsion spring mounting system with the option to add sound absorbing materials or an acrylic cover (*contact Velaria Systems for available acrylic panel options*)

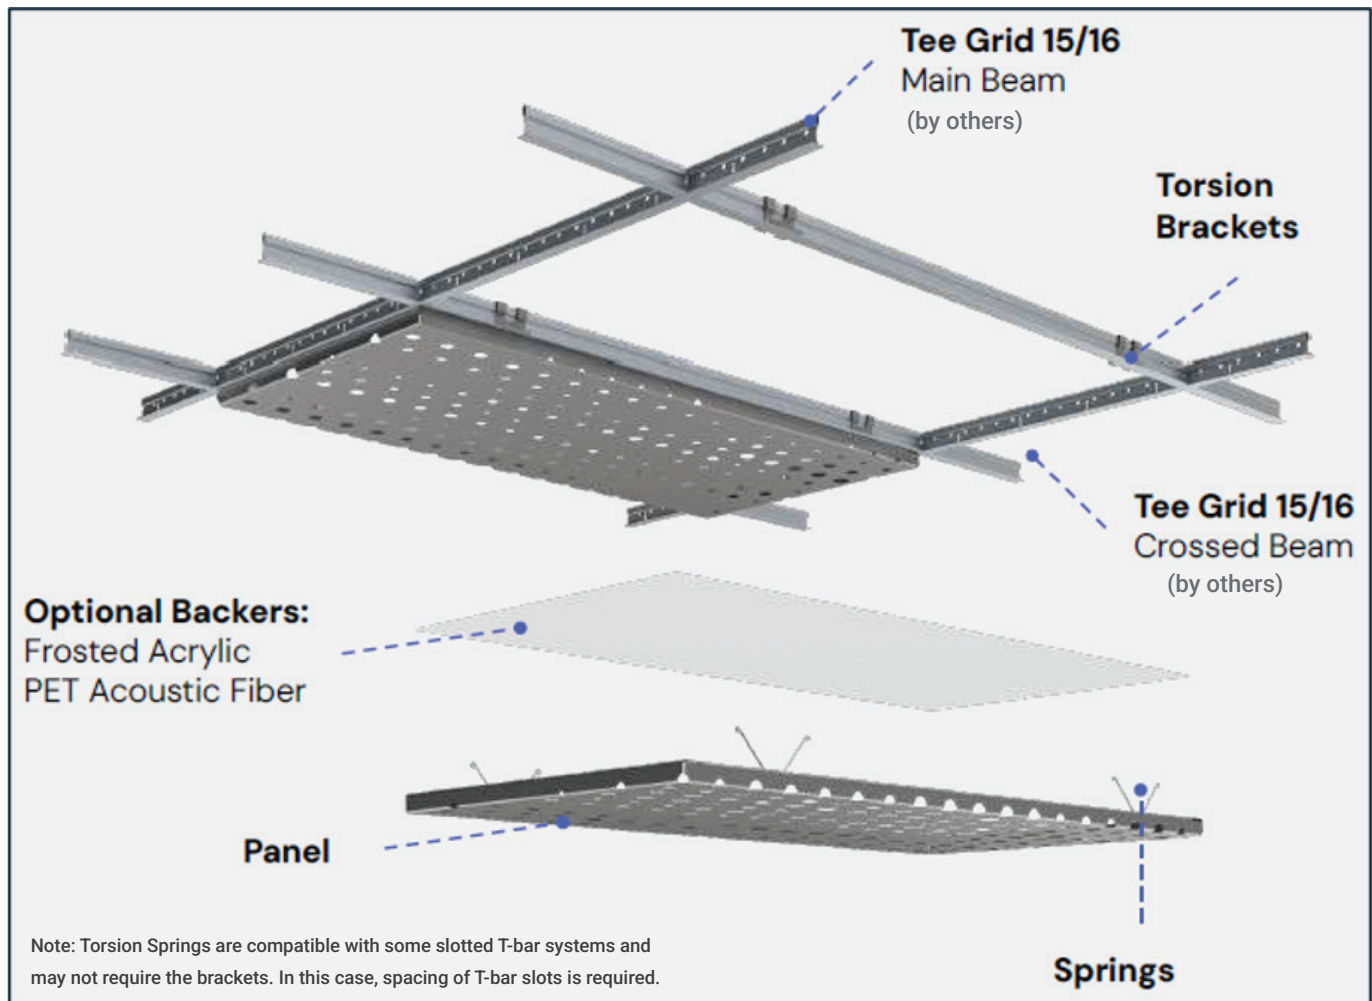


Material	Aluminum (0.080" thickness)
Panel Sizes (ft)	Nominal 2x2, 2.5x2.5, 2x4, 2x6, 2x8
Max. Weight (lb/sqft)*	1.12
Finishes	Powdercoat Paint: Standard RAL or Special
Fire Rating	Aluminum is a "non-combustible material" (ASTM E 136)

*Weight of panel prior to perforation

Perforated Metal / CEILINGS

Torsion Spring Mounting

A simple 3-step procedure enables quick and accurate panel installation.

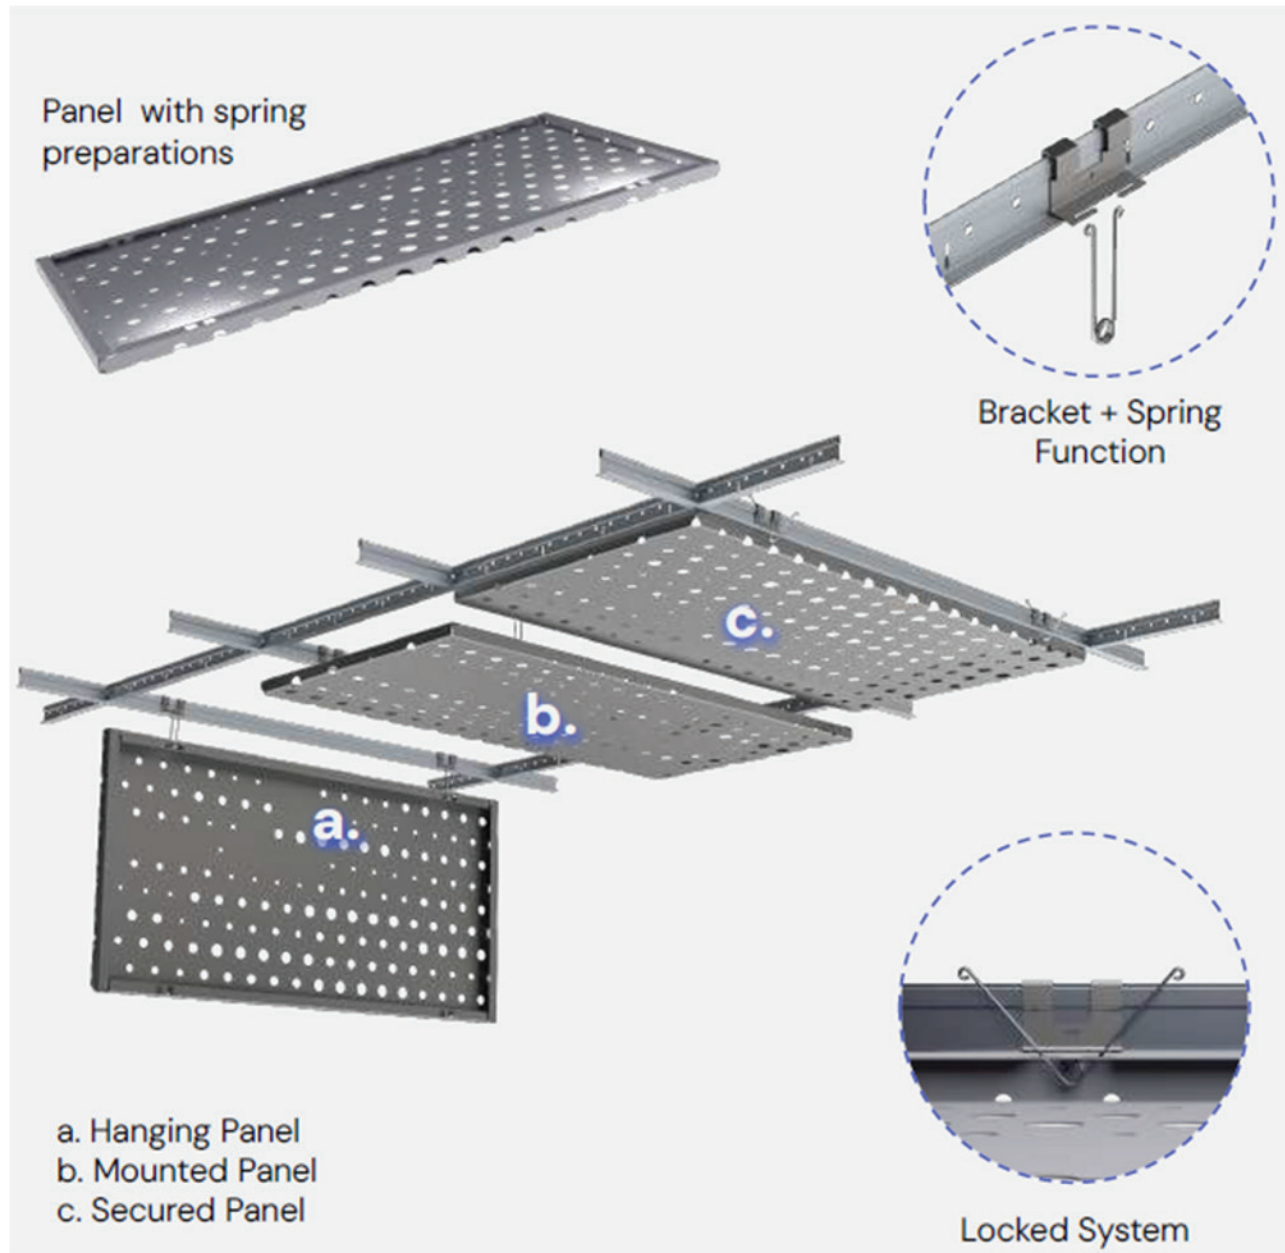


Simple 3-Step Installation

1. Clip Spring Bracket to T-Bar
2. Attach Spring to one side of the panel
3. Rotate up and attach 2nd side of the panel


Perforated Metal / CEILINGS

Layout Details

For 2' x 2' and 2' x 4' ceilings, the main T-grids are installed at 48" centers, as shown below.

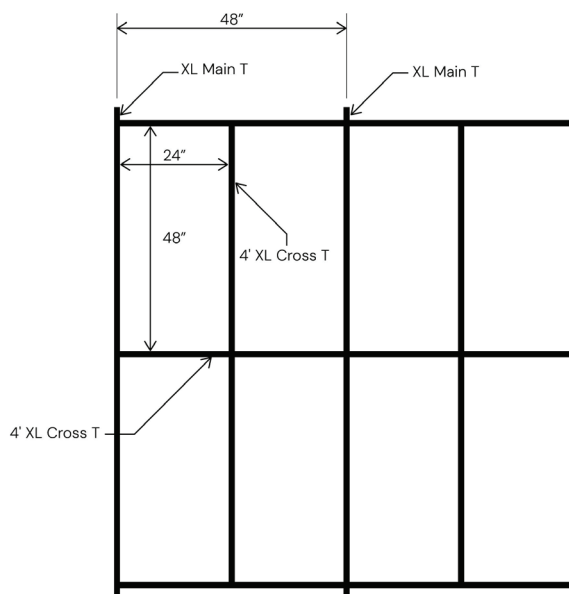


For 2'x6' ceilings, the main tees are installed 48" apart center to center. Then, the secondary tees of 48" should cross the main tees at a 90° angle every 72" as shown below.

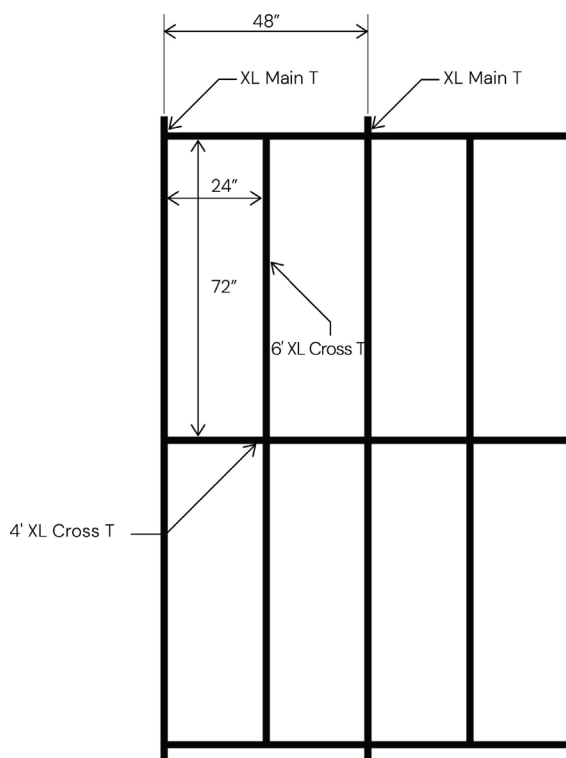

Perforated Metal / CEILINGS

Layout Details


For 2'x8' ceilings, the main tees are installed 24" apart center to center. Then, the secondary tees of 24" should cross the main tees at a 90° angle every 96" as shown below

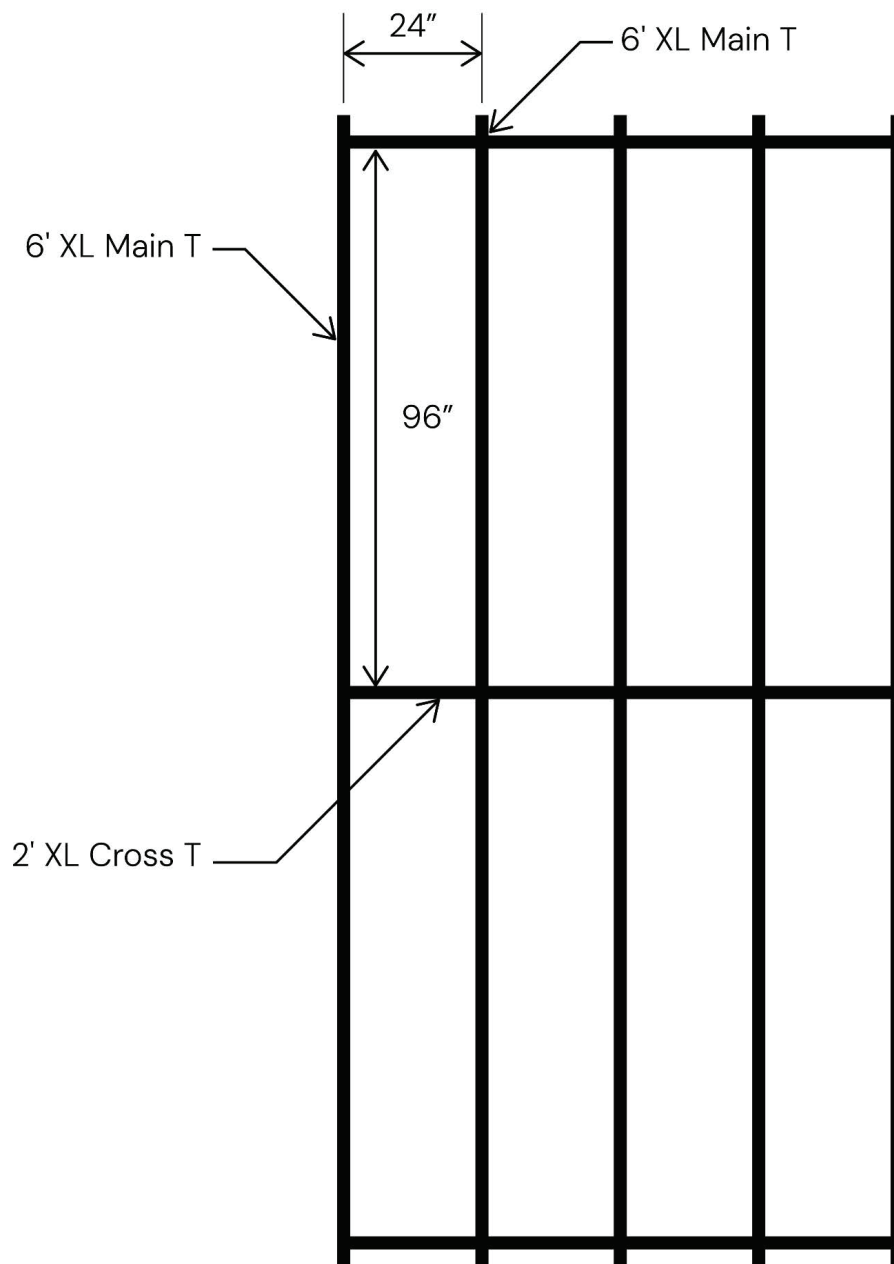

Perforated Metal / CEILINGS




Finishes

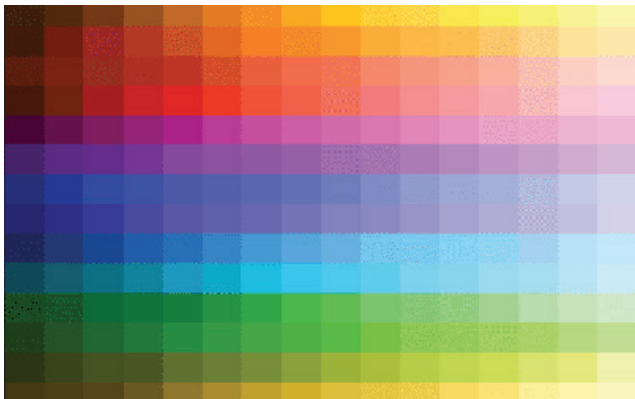

RAL Powdercoat

A highly durable finish available in a virtual rainbow of standard colors.

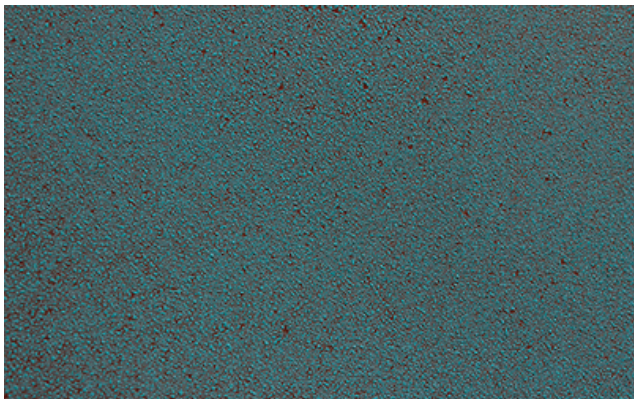


Special Powdercoat Finishes


This range of finishes offers textured, patina, anodized and metallic appearances.

Acoustic PET Felt

To ensure a high degree of noise reduction at the ceiling you can choose to add thick felt sound absorption behind the perforated metal panels or where acoustic performance is less critical but you want more aesthetic choice, you can select from a range of felt colors that make a significant contribution to reducing noise in the space.

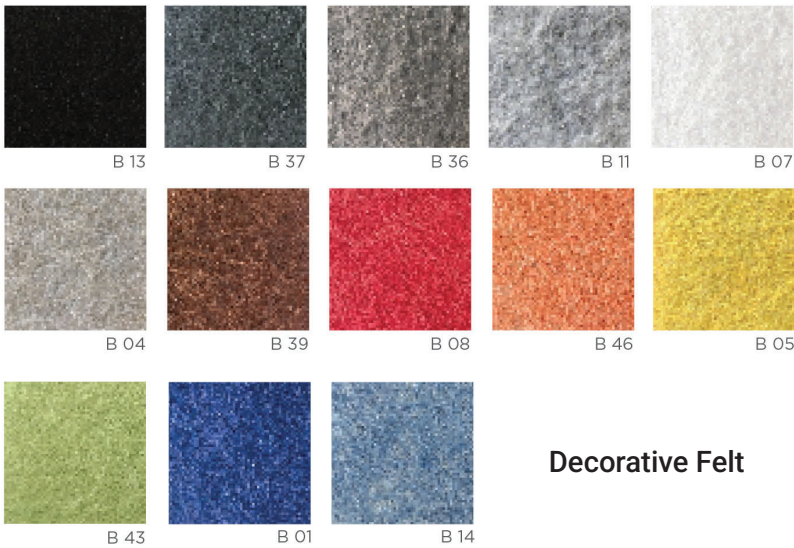

Decorative Felt

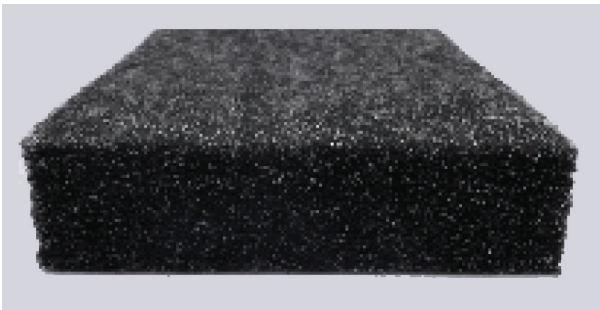

High Performance Felt

	Decorative Felt	High Performance Felt
Thickness	0.35"	2"
Colors	13 choices (Bxx)	Black/Dark Grey
Acoustic Rating (NRC)	0.25-0.80 (dependent on setback from metal surface)	0.85
Fire Rating (ASTM E84)	Class A	Class A

Perforated Metal / CEILINGS



Specification Codes

NOTE: Specification Codes are provided for use as simple references to Velaria Systems Perforated Metal products in specifications and/or construction documents and do not include all details required to define the system. Specification Codes are NOT ordering codes. In order to receive quotations or purchase these products from Velaria Systems, finish colors, and in the case of Picto, image details are required. Velaria Systems may also request additional information before issuing a quotation or accepting a purchase order.

VS		C		PM									
1		2		3		4		5		6		7	
8													
1 <u>SUPPLIER</u>		2 <u>TYPE</u>		3 <u>PRODUCT</u>		4 <u>PATTERN TYPE</u>		5 <u>PATTERN #</u>		6 <u>PANEL SIZE</u>		7 <u>FINISH</u>	
VS = Velaria Systems		C = Ceiling		PM = Perforated Metal		SPU = Standard Puncto APU = Abstract Puncto LAS = Lasion PIC = Picto CUS = Custom		Choose from list provided		22 = 2x2 24 = 2x4 26 = 2x6 28 = 2x8 25S = 2.5x2.5 Square		RAL = RAL selection SPF = Special Finish	
8 <u>BACKING</u>		N = None DFBxx = Decorative Acoustic Felt Bxx color HPF = High Performance Felt ACR = Frosted Acrylic											

Warranty



5 Year warranty on materials.