

### Good Design vs Hope

What sets Velaria Systems apart from other stretch ceiling companies is our understanding of illumination and the depth of information available for you to make an informed choice that ensures the best lighting possible in your space.



We don't just add some lights and hope for the best. Velaria Systems provides photometric files to ensure you can calculate the illuminance, color rendering data to ensure people look and feel better, and a wide range of color temperature options to ensure the mood of your space is set exactly the way you want it.

We source lighting solutions from leading suppliers of illumination products that have been designed specifically for luminous ceilings or as complementary lighting for acoustic membrane solutions.

### The Biggest Difference

Perhaps the biggest difference between Velaria Systems and others is that we've already solved illumination.

What does that mean?...


Instead of offering a selection of translucent membranes and telling you to figure out how much light you may get on your own, we have tested and selected the best combination of membranes that ensures optimum system efficiency while preserving the quality of light and acoustic performance that are the keys to an integrated FAL (Finishes + Acoustics + Light) system.

Providing illumination is a critical task that shouldn't be left to chance. You can provide Velaria Systems' data to your team's lighting design professional with confidence, or you can work with our Design Studio to generate the illuminance calculations you need to verify that your design will meet requirements for illumination levels, light quality, and applicable energy codes.



### Selecting Your Illumination

**Color Temperature (CCT):** Lower color temperatures will enhance warm finishes and evoke intimate experiences while higher values will highlight cooler colors and give a sense of action to your environment.

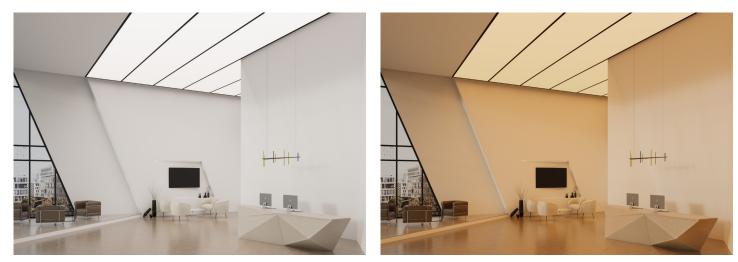

Illumination Systems are available in the following color temperatures (CCTs):

#### Fixed CCT:

A single color temperature: 2700K, 3000K, 3500K, 4000K, 5700K

#### **Tunable White:**


Uses a control system to select or dynamically change any color temperature within the following range: **2700K-5700K** 

**Illuminance Levels (footcandles):** Using a Velaria Systems illumination system is a great way to provide superior quality lighting that fills your space with vibrant but comfortable light.

The first step is to determine what illumination level you require: are you creating a bright in-store retail experience that requires high levels of illumination. Or a more subdued hospitality experience where visual acuity is still important, but a more intimate feeling is desired?

Our illumination systems are offered with 3 light output options (Standard, Enhanced, Ultra) designed to deliver the appropriate level of illumination no matter your application. While there may be several factors influencing the final lighting design - contrast ratios for sales environments, energy code considerations, or others – Velaria Systems has a solution for you.



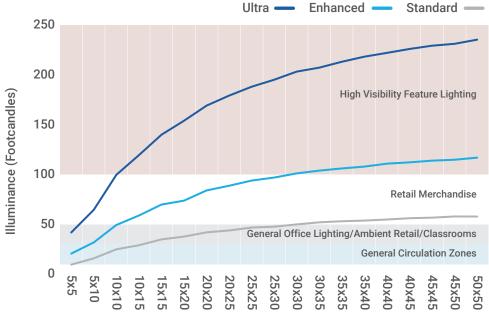

Illumination Area - No Walls (ft)

To help you determine exactly what you need, the Velaria Systems Design Studio will guide you through the selection process with expert assistance and tools. If you prefer to hand off the task to the lighting design professional on your team, we have all of the data they will need to create a complete lighting design, including IES files for design calculations.

**Light Output & Power:** Once you have selected your color temperature and illuminance level, you will be able to determine the light output and power consumption values from the table below.


	Stand	lard	Enhar	nced	Ultra		
ССТ	Light Output (Im/sqft)	Power W/sqft)	Light Output (Im/sqft)	Power W/sqft)	Light Output (Im/sqft)	Power W/sqft)	
2700K	92	1.1	184	2.3	368	4.5	
3000K	92	1.1	184	2.2	368	4.2	
3500K	92	1.0	184	2.0	368	3.9	
4000K	92	1.0	184	2.0	368	4.0	
5700K	92	1.0	184	2.0	368	4.1	



### **Acoustic Performance**

Velaria Systems illumination systems come standard with superior acoustic performance that will significantly contribute to reducing noise in your space.

For even better comfort, Velaria Systems offers Enhanced and Ultra levels of acoustic performance; and for spaces where noise levels are less of a concern, a budget-friendly Basic option is also available.




## Illumination Configurations

Performance Level	Description	Noise Reduction Coefficient (NRC)
Standard	Outer Layer Acoustic Membrane + Inner Layer of Acoustic Membrane + Non-acoustic light sheet	0.70
Enhanced	Outer Layer Acoustic Membrane + Inner Layer of Acoustic Membrane + Acoustic light sheet + Acoustic Absorber	0.85
Basic	Outer Layer Non-acoustic Membrane + Inner Layer of Non-acoustic Membrane + Non-acoustic light sheet	N/A

## Configurations

(based on typical 6" space between surface and outer membrane)

### Standard



	Frequen	cy (Hz)					Noise Reductic Coefficient	Weighted Sound Absorption Coefficient (ISO EN 11654)	Sound Absorption Class (ISO EN 11654)
	125	250	500	1000	2000	4000	NRC	a <sub>w</sub>	Class
α <sub>s</sub>	0.23	0.61	0.71	0.79	0.73	0.54	0.70	0.7	С
	Wall Surface			Ceiling Surface	Non-Acou Light She Acoustic Membran Acoustic Membran	et e	0.90 0.80 0.70 0.60 0.50 0.50 0.50 0.40 0.30 0.20 0.10 0.00	200 Frequency (H	Weighted Absorption 4000 12500 z)

#### Enhanced


Surface

	Freque	ncy (Hz)					Noise Reduction Coefficient	Weighted Sound Absorption Coefficie (ISO EN 11654)	rption Coefficient Class (ISO EN 1165	
	125	250	500	1000	2000	4000	NRC	aw	Class	
α <sub>s</sub>	0.51	1	0.79	0.87	0.76	0.54	0.85	0.75 (L)	С	
			4	Ceiling Surface	Acoustic Acoustic	Layer	1.20 1.00 0.80 0.60 0.60		Weighted Absorption	
	Wall				Light She	et	0.40		$\sim$	

Absorp Membrane 0.20 Acoustic 0.00 Membrane 125 100


Acoustic

0.40





Basic




Test Data Unavailable

### **Fire Ratings**

The fire rating for the membranes used for illumination is ASTM E84 Class A.



### Environmental



A+ rating for Volatile Organic Compounds (VOC) emissions



### Certifications



CE CERTIFICATE OF CONFORMITY CE: 1488-CPD-0106/W COMPLIANCE WITH STANDARD: EN 14716:2008 (system of assessment and verification of performance constancy 1)



## How to Specify

Using our simple process, specifying an illuminated membrane system is easy.

- 1. Select your light levels and color temperature (CCT)
- 2. Enhance your acoustic performance (or not)
- 3. Contact Velaria Systems In addition to your selections, we will need to know:
  - Size
  - Mounting Requirements (so we can select the correct profile to meet your requirement)\*

\*A wide selection of profiles is available to suit your specific requirements. Velaria Systems experts will recommend the best option to meet those requirements. No need for you to sort through a huge catalogue.